





TS SERIES - ADJUSTABLE RANGE THERMOSTATS

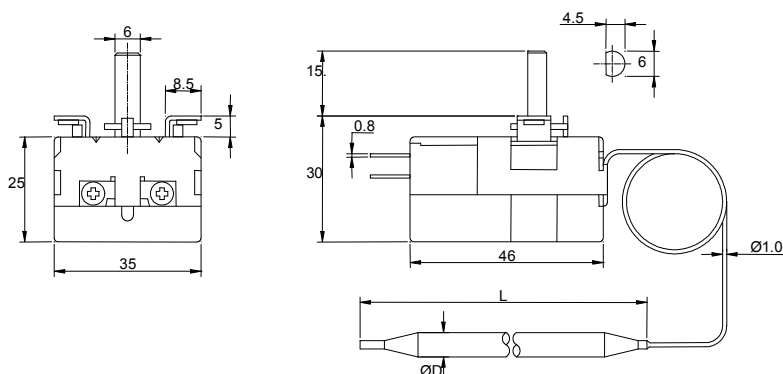

Available Temperature Range: from -30°C to 320°C

Maximum Body Temperature: 150°C

Electric Rating: 16A/250VAC, 10A/380VAC



Switch Circuitry: Single pole double throw (SPDT)

Mounting: Standard M4 mounting brackets (28mm center to center)


Terminal Type: 45° , 90° , Straight

Thermostat Weight: 70g, 117g (c/w bezel & knob & stuffing bolt)

Stuffing Bolt (M12)



Metal



Black

Part No.	Temp. Range ($^{\circ}\text{C}$)	Sensor Size		Capillary Length (mm)	Stuffing Bolt
		$\varnothing$ (mm)	L (mm)		
TS-030-SR	$-30 \sim 30$	5.8	126	1000	No
TS-050-SB	$0 \sim 50$	5.8	126	1000	No
TS-090SB-C	$0 \sim 90$	5.8	126	1000	Yes
TS-120-SB-C	$0 \sim 120$	5	104	1000	Yes
TS-120-SB-C	$0 \sim 120$	5	104	**2000	Yes
TS-150-SB-C	$30 \sim 150$	5	100	**2000	Yes
TS-200-SB	$0 \sim 200$	5	60	1000	No
TS-200-SB	$0 \sim 200$	5	60	**2000	No
TS-250-SB	$0 \sim 250$	5	67	1000	No
TS-320-SB	$50 \sim 320$	3	144	1000	No
TS-320-SB	$50 \sim 320$	3	144	**2000	No